


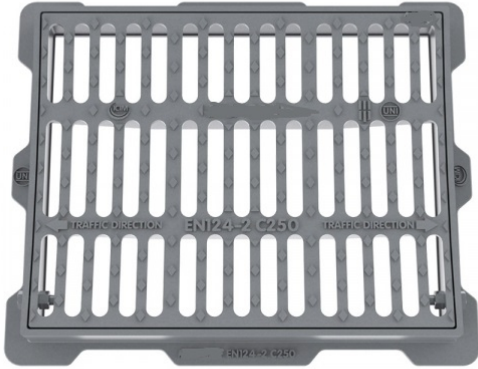

Ductile iron gully top with 15mm concave surface h638_81

Rectangular road gully top with C250 load capacity. Dimensions: W.550xD.450xH.60mm

Ductile iron gully top equipped with **hinge and grating** with high **drainage capacity** of 7.84 dm², **hinged to the rectangular frame** by a pair of bolts and nuts with **locking** function in case of tampering or theft. Rectangular cover corresponding to road level and **surface with 15mm concavity** to create the minimum useful slope on the extrados. Road gully top with **Load capacity of C250** suitable for ensuring **safety and stability** near road edges and suitable for buses and **people with disabilities in wheelchairs**.

Technical Features:

- Material: ductile iron
- Dimensions: W.550xD.450xH.60mm
- Clear opening: 350x450
- Drainage: 7.84 dm²
- Weight: 21 Kg
- Load class: C250 - road edges, manhole covers, gully tops and gratings
- suitable for people with disabilities
- with breaking strength >250kN
- surface with 15mm concavity
- identification details and anti-slip

INFORMATION

- Length in millimetres 550.000000
- Depth in millimetres 450.000000
- Height in millimetres 60.000000

Ductile iron gully top with 15mm concave surface h638_81

