



Ductile iron manhole cover class C250 h638_197

Square manhole cover in ductile iron C250, external 500x500 mm. Equipped with elastic snap closure system, odor-proof seat and non-slip surface.

The **ductile iron manhole cover class C250 h638_197** is a high-performance technical component designed for covering inspection manholes in road and industrial environments. Made of **ductile iron GJS-500-7**, this model complies with the EN 1563 standard and is distinguished by its **class C250** certification, which allows its installation in parking areas, car parks and sidewalk edges. The product solves the problem of unpleasant odors thanks to the **internal "U" seat**, which creates an airtight barrier when filled with insulating materials. Furthermore, the automatic closure system with elastic tabs ensures a stable locking of the cover in the frame, preventing accidental lifting or unauthorized removal.


Technical features

- **Material:** Ductile iron GJS-500-7 compliant with the EN 1563 standard
- **Load class:** C250 (test load 25 tons)
- **External dimensions:** 500 x 500 mm
- **Clear opening:** 400 x 400 mm
- **Profile height:** 40 mm
- **Weight:** 16.00 kg
- **Closure system:** Automatic snap closure with elastic tabs and lugs
- **Tightness:** "U" seat for odor-proof seal
- **Safety:** Non-slip reliefs for water drainage
- **Certifications:** UNI EN 124 and ISO 9001:2015

* Image purely indicative

INFORMATION

- **Material manhole covers** ghisa
- **manhole_dimensions** 500 x 500 mm

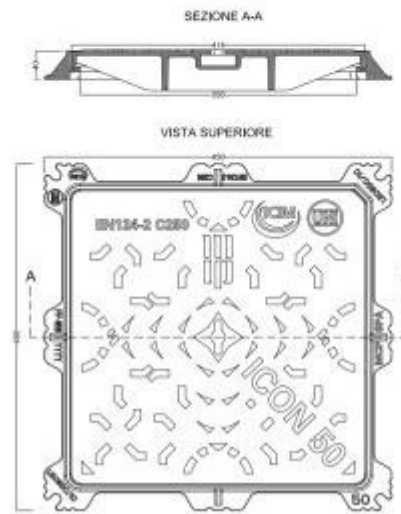

**Ductile iron manhole
cover class C250
h638_197**

Manhole cover dimensions: 500 x 500 mm
Manhole cover material: ghisa