


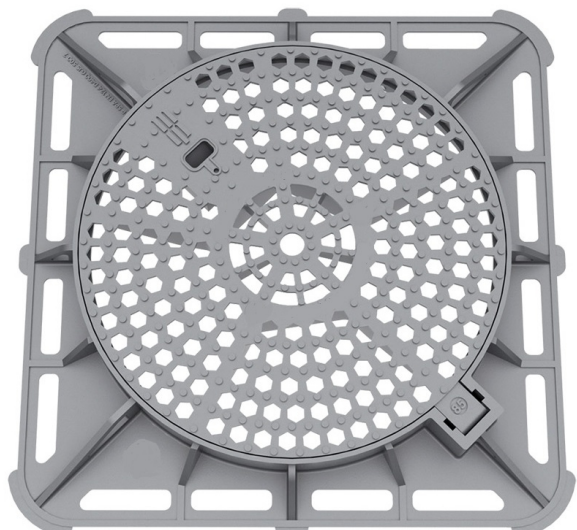

Flat ductile iron gully grate h638_127

Flat gully grate in ductile iron with square base frame. External dimensions: 850 x 850 mm. Height: 100 mm.

Road gully grate in ductile iron according to **standard UNI EN 124** and **ISO 9001:2015 certified**. Its structure consists of a **square-shaped frame** at the base and **circular at the top**, corresponding to the road level. The frame includes a continuous **external peripheral flange** equipped with **slots for anchoring to the ground**; **internal rebate with anti-noise and anti-rocking elastomer gasket**; **shaped lug on the internal edge** for locking the grate closing system; functional **eyelets** for handling during installation phases; **closed-bottom hinge compartment** with lid locking system in the open position. The **circular grate with honeycomb slots** is equipped with a **closed-bottom slot**; **automatic closing system** and **anti-slip reliefs**. There is an **appendix** designed to ensure the articulation of the lid to the frame in the hinge compartment which does not compromise the extractability of the lid itself.

Technical features:

- External dimensions: 850 x 850 mm
- Height: 100 mm
- Clear opening: Ø 610 mm
- Drainage: 9 dm²
- Lid weight: 32 kg
- Frame weight: 31 kg
- Total weight: 63 kg
- Material: ductile iron
- Flat surface
- Frame: square
- Lid: circular
- Hinge
- 90° block hinge
- Automatic closing
- Gasket
- Honeycomb grate
- Anti-slip reliefs and specific identification of the frame's external dimensions expressed in cm
- Class: D400
- Manufactured according to UNI EN 124 standard
- ISO 9001:2015 Certification

**Images for indicative purposes only.*

INFORMATION

- Length in millimetres 850.000000
- Depth in millimetres 850.000000
- Height in millimetres 100.000000

HOLITY.COM

Flat ductile iron gully grate h638_127

