



Flood protection barrier h729_63

Removable flood protection barrier h729_63 (125x60 cm) in 15mm plywood and aluminum. Closed-cell gasket, installation in 5 minutes.

The **flood protection barrier h729_63** is an adjustable and removable protection barrier designed to effectively defend private homes, commercial premises, and shops from sudden water infiltration. Designed to solve operational water emergencies, it allows for securing entrances in just 5 minutes, damming floods up to 60 cm in height. The structure combines a solid 15 mm plywood panel with aluminum profiles and an advanced closed-cell foam gasket system, ensuring a waterproof, structurally reliable, and reusable hydraulic block over time.


Technical features

- **Type:** Adjustable, removable, and reusable flood protection barrier
- **Overall dimensions (W x H):** 125 x 60 cm
- **Main panel material:** Plywood (15 mm thickness) equipped with 2 series of 3 holes distributed along the length
- **Reinforcement and anchoring structure:** Special aluminum profiles on the horizontal edges (top and bottom) and two lateral corner profiles
- **Watertight system:** Closed-cell foam gaskets (two vertical at contact points, one horizontal against the floor)
- **Protection capacity:** Up to 60 cm of water height
- **Operational timing:** Profile pre-installation 3 hours; emergency barrier installation 5 minutes
- **Included assembly equipment:** Sealant adhesive cartridge and assembly/fixing hardware (plastic anchors and lag bolts)
- **Tools not included:** Caulking gun (for silicone/sealant)

** Images are purely indicative*

INFORMATION

- **Length** 125 cm

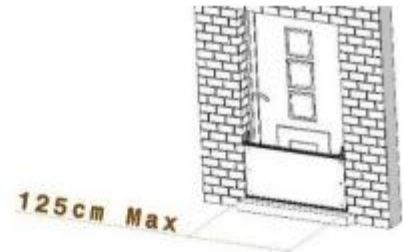

Flood protection barrier
h729_63

Length: 125 cm