



Operating room seconds counter clock h775_17

Wall clock for operating room. Power supply: 110/230 VAC. Dimensions: W.460 x D.45 x H.147 mm.

Professional operating room clock with sanitizable stainless steel housing and recessed mounting. The item allows displaying hours, minutes, seconds or stopwatch. **Character height is 7 cm (5 cm for seconds) with an optimal reading distance of 30 meters.**

Brightness is adjustable in four levels and the reading angle is 120°. The device can be silenced and programmed or set via two buttons. The digits are composed of 7-segment LEDs, each consisting of three LEDs. Power consumption is 55 mA.

The clock is designed to operate in a temperature range between -5°C and 55°C. **Power supply is 110/230 VAC.** Electrical protection is class 2 and PoE consumption is maximum 4W, class 0.

Clock technical specifications:

- Red digital LED clock
- Stainless steel housing (IP65, IK07) with mineral glass protection and keyboard compliant with operating room requirements.
- For indoor use
- Hours, minutes and seconds display
- Character height: 7 cm (5 cm for seconds)
- Optimal reading distance: 30 meters
- **Power supply is 110/230 VAC**
- Recessed mounting with 4 holes
- Reading angle: 120°
- Silent operation
- Programming and setting via 2 buttons
- Digits consisting of 7 segments with 3 LEDs each
- Consumption: 55mA
- Operating temperature: from -5 to 55°C
- Weight: 2.2 kg
- Electrical protection: class 2
- Dimensions: W.460 x D.45 x H.147 mm

Separately, as an **optional**, it is possible to purchase the **rear cover**, useful for protecting the clock from dust and moisture.

**Upon request and subject to quotation, LEDs in other colors are available*


INFORMATION



Dimensioni orologio:



Dimensioni cassa:

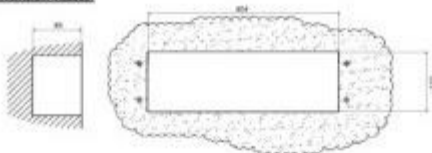

Dimensioni cover orologio:

