


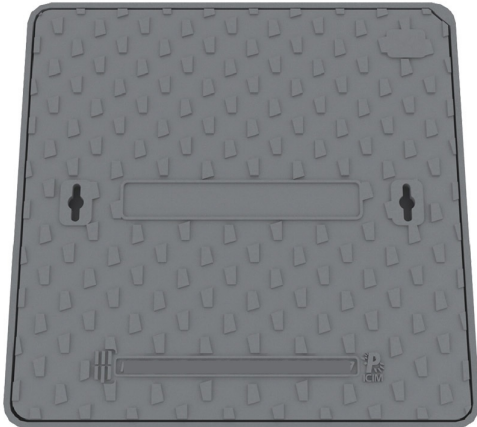

Road manhole cover 46x46 cm h638_83

Ductile iron manhole cover 460x460 mm. Failure load > 250kN class C250.

Ductile iron manhole cover, with a **square shape**, produced in accordance with the latest edition of the **UNI EN 124 standard**. Ideal for **loading classes C250**, (for use in car parks, yards, industrial sites and areas with slow-moving traffic) by an **ISO 9001:2015 certified** company. Consisting of a frame, without an external perimeter flange, square in shape both at the base and at the top corresponding to the level of the road surface, equipped with a "U" shaped internal seat to obtain odor tightness by filling with sand and/or equivalent materials in coupling with the cover; chamfered internal corner for the unique insertion of the cover. **The square-shaped cover** is equipped with closed-bottom slot(s) suitable for receiving the lifting key; chamfered corner for unique insertion into the frame; space for inserting any writing and/or logos (e.g. contracting authority + etc.); maximum interlocking depth; identification detail of the external dimensions of the frame expressed in cm; anti-slip patterns uniformly distributed for the complete drainage of runoff water.

Technical features:

- Material: cast iron
- Frame shape: square
- Cover shape: square
- Hermetic
- External dimensions: 460x460 mm
- Clear opening: 400x400 mm
- Height: 35 mm
- Weight: approx. 35 kg
- Class C250
- Place of use: pavements with interlocking blocks.

*image purely indicative

INFORMATION

- **Material manhole covers** ghisa
- **manhole_dimensions** 460 x 460 mm

Road manhole cover 46x46 cm h638_83

Road manhole cover 46x46 cm h638_83

Manhole cover dimensions: 460 x 460 mm

Manhole cover material: ghisa

