



Safety shower with eyewash h641_10

Emergency shower with eyewash. Material: galvanized steel and ABS. Manual and foot pedal operation.

Safety shower to be installed in workplaces to ensure first aid cleaning and rescue for body parts exposed to harmful substances or excessive heat. Consisting of a **structure with galvanized steel pipes** and a base prepared for floor fixing. Equipped with an **ABS shower head manually operated** via a rigid pull rod with triangular handle and **eyewash operated via foot pedal**, consisting of an **ABS basin** and spray heads fitted with dust caps.

Technical features:

- Use: outdoor
- Manual and foot pedal operation
- Floor fixing
- ABS shower head green RAL 6029
- Eyewash in ABS RAL 6029
- Galvanized steel pipes + green epoxy paint RAL 6029
- Supply: F1"
- Drainage: F1 1 / 4"
- Eyewash flow rate (L/min): 11
- Shower flow rate (L/min): 75
- Weight (kg): 24
- Product compliant with EN 15154-1 and EN 15154-2 standards


- Product compliant with article R. 4224-14 of the Labor Code
- Product compliant with ISO 3864

INFORMATION

- **Activation** Manual/pedal
- **Type** con lavaocchi
- **fixing** floor

HOLITY.COM

Safety shower with eyewash h641_10

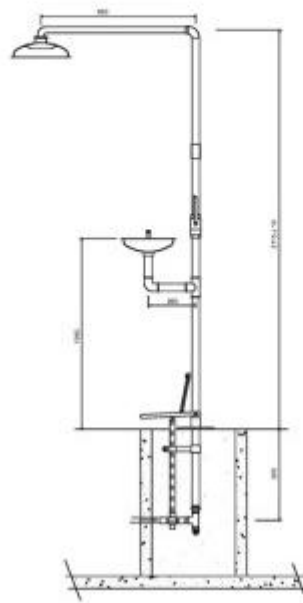

Safety shower with eyewash h641_10

Drive: Manual/pedal

Typology: con lavaocchi

Fixing: a pavimento