

Wall-mounted liquid soap dispenser h218_253

Wall-mounted dispenser h218_253 in chrome-plated brass (Ø34x190 mm) for liquid soap/disinfectant. Laser sensor, 220V power supply and 1500 ml tank.

The **Wall-mounted liquid soap dispenser h218_253** is an automatic no-touch dispenser designed for wall installation in professional washrooms. This technical furnishing component solves the operational problem of manual contact and the risk of cross-contamination, offering hygienic dispensing managed via an integrated laser sensor. Intended for managers of hospitality facilities, offices, commercial spaces, and public complexes, the device is suitable for high-traffic areas with high hygiene requirements. The structure features a chrome-plated cast brass body according to the EN248 standard, robust and vandal-proof, combined with internal components in POM and ABS plastic. Operation is exclusively powered via connection to the electrical grid (AC 220V - 50/60Hz / DC6V). To operate the device, simply place your hands under the dispenser within the sensor's detection range (from 5 to 23 cm); dispensing activates automatically and remains in operation as long as the hands stay within the range, with an adjustable maximum operating time. The reusable tank has a capacity of 1500 ml and is compatible with liquid soap or hand disinfectant (7.5%) with a viscosity between 100 and 3800 cPs, dispensing a standard soap dose of 0.8 cc (adjustable). The overall size of the body is Ø34 x 190 mm in depth. The dispenser is supplied complete with fixing elements and all the accessories necessary for mounting. For maintenance, it is recommended to clean with water and pH-neutral soap, drying with a clean cloth and protecting the dispenser from splashes when cleaning the room with aggressive products.


Technical features

- **Type:** Automatic liquid soap dispenser for wall mounting
- **Body material:** Chrome-plated brass (chrome-plated cast brass according to EN248 standard)
- **Internal components material:** POM and ABS plastic components
- **Operation:** Integrated laser sensor
- **Power supply:** Exclusively via connection to the electrical grid (AC 220V - 50/60Hz / DC6V)
- **Sensor detection range:** From 5 to 23 cm
- **Tank capacity:** 1500 ml (reusable)
- **Standard soap discharge:** 0.8 cc (adjustable)
- **Permitted soap viscosity:** 100 - 3800 cPs
- **Detergent compatibility:** Liquid soap or hand disinfectant (7.5%)
- **Dimensions:** Ø34 × 190 mm (depth)
- **Standby consumption:**

INFORMATION

- **Capacity** 1500 ml
- **Width in millimetres** 34.000000
- **Depth in millimetres** 190.000000
- **supply** electric

Wall-mounted liquid soap dispenser h218_253

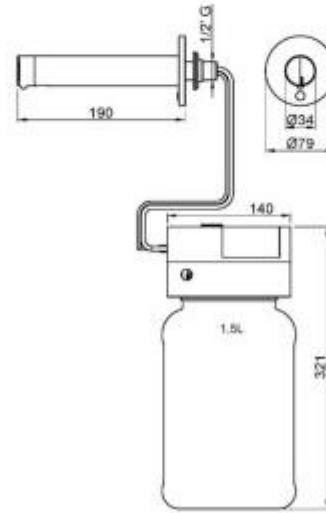

Wall-mounted liquid soap dispenser h218_253

Height in millimeters: 399 mm
Capacity: 1500 ml
Width in millimeters: 401 mm
Depth in millimeters: 400 mm
Supply: electric