


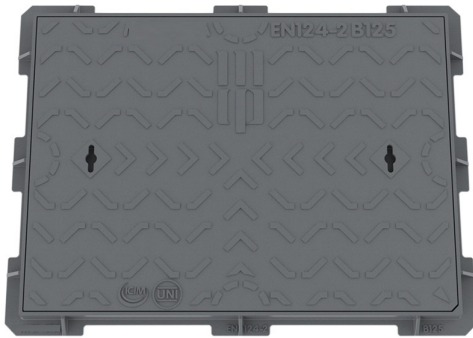

Rectangular ductile iron manhole cover h638_89

Ductile iron road manhole cover, rectangular. Class B125. Dimensions: 600x800 mm.

Ductile iron manhole cover, according to the provisions of the latest edition of the **UNI EN 124** standard, load class **B125**, for use in areas accessible to **very light vehicles**: sidewalks, pedestrian areas, parking areas, and multi-story car parks. From an **ISO 9001:2015 certified** company, consisting of a **rectangular-shaped frame** both at the bearing base and at the top corresponding to the road level, equipped with an adequate external perimeter flange, continuous on all four sides to provide a larger bearing base and allow for better anchoring to the foundation; reinforcement ribs where provided; internal "U"-shaped seat to achieve odor tightness by filling with sand and/or equivalent materials in conjunction with the cover; rounded internal corner for unique cover insertion. Rectangular cover equipped with closed-bottom slot(s) suitable for accommodating lifting keys; space for the insertion of any lettering and/or logos (e.g. contracting entity + etc.); rounded corner for unique insertion into the frame; **non-slip embossments** uniformly distributed for the complete drainage of runoff water.

Technical characteristics:

- Material: ductile iron
- External dimensions: 600x800 mm
- Clear opening: 500x700 mm
- Height: 40 mm
- Odor-tight
- Frame shape: rectangular
- Cover shape: rectangular
- Class: B125
- Weight: approx. 33 kg

*image for illustrative purposes only

INFORMATION

- **Material manhole covers** ghisa
- **manhole_dimensions** 600 x 800 mm



Rectangular ductile iron manhole cover h638_89

Manhole cover dimensions: 600 x 800 mm

Manhole cover material: ghisa